


SEVENTH EDITION

SHIP STABILITY FOR MASTERS AND MATES

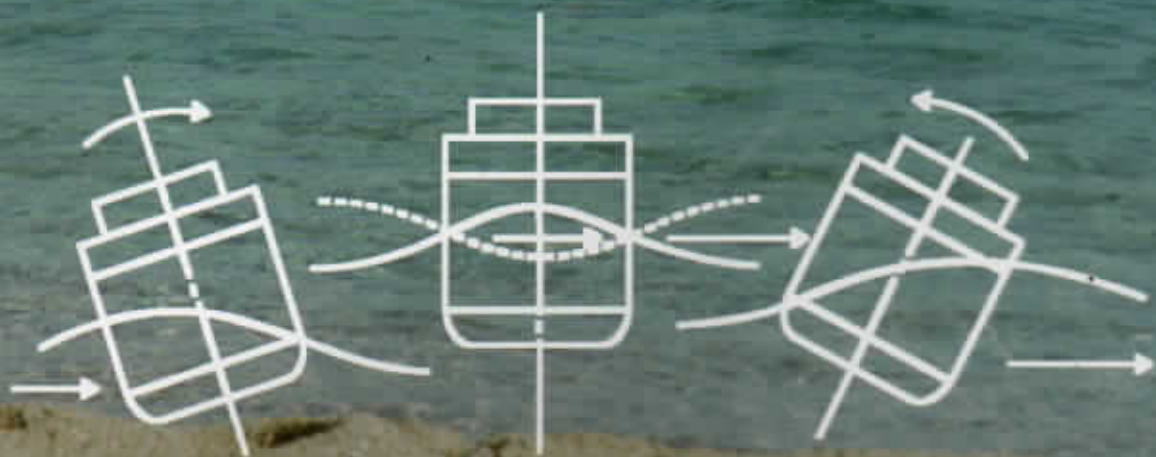

C. B. BARRASS
D. R. DERRETT

B
H

Ship Stability for Masters and Mates

C. B. Barrass and D. R. Derrett



AMSTERDAM • BOSTON • HEIDELBERG • LONDON • NEW YORK • OXFORD
PARIS • SAN DIEGO • SAN FRANCISCO • SINGAPORE • SYDNEY • TOKYO

Butterworth-Heinemann is an imprint of Elsevier



Contents

<i>Acknowledgments</i>	ix
<i>Preface</i>	xi
<i>Introduction</i>	xiii

PART I Linking Ship Stability and Ship Motions

<i>Chapter 1: Group Weights, Water Draft, Air Draft, and Density</i>	3
<i>Chapter 2: Transverse Statical Stability</i>	15
<i>Chapter 3: Effect of Decreasing Free Surface on Stability</i>	23
<i>Chapter 4: TPC and Displacement Curves</i>	29
<i>Chapter 5: Form Coefficients</i>	37
<i>Chapter 6: Discussion on LCB Position Relative to Amidships</i>	45
<i>Chapter 7: Quadrature – Simpson’s Rules for Areas and Centroids</i>	51
<i>Chapter 8: Quadrature – Simpson’s Rules for Moments of Inertia</i>	81
<i>Chapter 9: Quadrature – Simpson’s Rules for Centers of Pressure on Transverse Bulkheads</i>	91
<i>Chapter 10: KB, BM, and KM Calculations and Graphics on Metacentric Diagrams</i>	101
<i>Chapter 11: Final KG Plus 20 Reasons for Rise in KG</i>	117
<i>Chapter 12: Angle of List Considerations – Text, Calculations, and Graphics</i>	123
<i>Chapter 13: Angle of Heel – Effects of Suspended Weights</i>	131
<i>Chapter 14: Angle of List Due to Bilging of Side Compartments</i>	139
<i>Chapter 15: Heel Due to Turning</i>	145
<i>Chapter 16: Angle of Loll</i>	149
<i>Chapter 17: Moments of Statical Stability</i>	157
<i>Chapter 18: Aspects of Trim – The Main Factors Involved</i>	167
<i>Chapter 19: Trim Calculations – Changing Conditions of Loading</i>	179
<i>Chapter 20: Trim Calculations – Satisfying Prescribed Requirements for End Drafts</i>	191

Chapter 21: Large-Angle Stability Considerations – GZ and KN Cross Curves of Stability	203
Chapter 22: Effects of Beam and Freeboard on Large Angle Stability.....	215
Chapter 23: Dynamical Stability Relating to Statical Stability Curves	219
Chapter 24: Changes in Statical Stability Relating to Wave Profiles – Loss of Quasi-Static Stability	227
Chapter 25: Hydrostatic Curves and Values for Vessels Initially on Even Keel	229
Chapter 26: Hydrostatic Curves and Values for Vessels Initially Having Trim by the Bow or by the Stern	235
Chapter 27: Increase in Draft Due to List	241
Chapter 28: Combined List and Trim	247
Chapter 29: Calculating Free-Surface Effects of Slack Tanks with Divisional Bulkheads.....	251
Chapter 30: Bilging Effects of Stability – Permeability Effects	263
Chapter 31: Effects of Side Winds on Ship Stability.....	281
Chapter 32: Icing Allowances Plus Effects on Trim and Stability	285
Chapter 33: The Sectional Area Curve.....	289
Chapter 34: FL and PL Curves Plus Type A and Type B Vessels.....	293
Chapter 35: Load Lines and Freeboard Marks	299
Chapter 36: Timber Ship Freeboard Marks	313
Chapter 37: IMO Grain Rules for Safe Carriage of Grain in Bulk.....	319
Chapter 38: True Mean Draft.....	331
Chapter 39: Inclining Experiment (Stability Test) Plus Fluctuations in a Ship's Lightweight.....	337
Chapter 40: The Calibration Book Plus Soundings and Ullages	345
Chapter 41: Drydocking and Stability – Procedures and Calculations.....	355
Chapter 42: Ship Squat in Open Water and in Confined Channels	367
Chapter 43: Turning Circle Diameter (TCD) Values for Vessels in Shallow Waters.....	389
Chapter 44: Interaction Effects, Including Two Case Studies	397
Chapter 45: Rolling, Pitching, and Heaving Motions	413
Chapter 46: Synchronous Rolling and Parametric Rolling of Ships	425
Chapter 47: Effects of Change of Density on a Ship's Draft and Trim	429
Chapter 48: The Deadweight Scale	433
Chapter 49: The Trim and Stability Book	437
Chapter 50: Simplified Stability Information	441
Chapter 51: The Stability Pro-Forma	447
Chapter 52: Looking Forward into the Next Decade	457

PART II Endnotes

<i>Chapter 53: Draft Surveys</i>	467
<i>Chapter 54: Quality Control — Plus the Work of Ship Surveyors</i>	473
<i>Chapter 55: Extracts from the 1998 Merchant Shipping (Load Line) Regulations Number MSN 1752(M)</i>	477
<i>Chapter 56: Keeping Up to Date</i>	483

PART III Appendices

<i>Appendix I: Summary of Stability Formulae</i>	487
<i>Appendix II: SQA/MCA 2004 Syllabuses for Masters and Mates</i>	501
<i>Appendix III: Specimen Exam Questions with Marking Scheme</i>	509
<i>Appendix IV: 100 Revision One-Liners</i>	519
<i>Appendix V: How to Pass Exams in Maritime Studies</i>	523
<i>Appendix VI: Ship Stability Data Sheets</i>	525
<i>Appendix VII: Capsize of the Herald of Free Enterprise — A Journalistic Review</i>	541
<i>References</i>	547
<i>Answers to Exercises</i>	549
<i>General Particulars of Selected Merchant Ships, Delivered 2007–2011</i>	557
<i>Nomenclature of Ship Terms</i>	559
<i>Index</i>	563

Index

Note: Page numbers with "f" denote figures; "t" tables

A

- Aft terminal, 296, 296f, 559
- After draft, maintaining, 191–192
- Air draft, 3
- Allegro Case Study, 405–411
- Amidships, LCB position relative to, 45–50
- Angle of heel, 15, 18–20, 131–138, 215–217, 220, 282f
- Angle of list, 124, 153–154
- Angle of loll, 18, 20–21, 149–156
 - correcting, 25–27
 - formulae, 495
- Angle of lurch, 283
- Angle of steady heel, 281
- Angle of vanishing stability, 209
- Appendages, 64–65
- Archimedes Principle, 506
- Area calculations, 56–61, 69–70
- Areas of irregular figures, 51–56
- Assigned freeboard, 309
- Asymmetrical build-up of ice, 286f
- Attwood's formula, 165

B

- Beam, effects of, 215–216
- Bilging, 263–280
 - amidships compartments, 263–270
 - effect on stability, 276–277
 - in end compartments, 270–275
 - of side compartments, 139–144
- Bilging and permeability formulae, 494
- Block coefficient, 370

- of fineness of displacement, 38–39
- Blockage factor, 370
- BM
 - determination of transverse, 104–109
 - formulae, 104, 159, 491
- Boot-topping area, 30–35, 42f
- Bow height, 303–305
- Box-shaped vessel, 241–244
 - BM calculation, 101
 - KB calculation, 101
- Broken stowage, 267t
- Bulkhead deck, 293
- Buoyancy, center of, 139

C

- Calibration book, 345–354
 - adjustments for angle of heel and trim, 350–352
 - methods for reading soundings and ullages, 346–350
 - temperature, adjustments for, 353–354
- Capsizing moment, 18, 20
- Cargo–Passenger vessels, 294
- Center of buoyancy, 15, 75, 139
- Center of flotation, 71–74, 168–169
 - determination using trim, 195
- Center of gravity, 15, 71–78, 117, 124, 131–136
 - effect of adding mass, 26
 - rise in, 120–122
- Center of pressure, 91–97
- Centers of pressure by Simpson's Rules, 91–100

- using horizontal ordinates, 91–94
- using vertical ordinates, 94–97
- Centre of flotation, using trim to determine, 187–190
- Centrifugal force, 145
- Centroid of area, 71–78, 103
- Change of draft, due to change of trim, 173–174
- Classification bodies, 310f
- Coefficient
 - block, 38–39
 - midships, 39
 - prismatic, 40–43
- Coefficient of fineness, 37–38
- Comfortable ships, 417f
- Common interval, 56
- Criterion of service numeral, 295
- Cross curves of stability, 203–208
 - GZ cross curves, 203–206
 - KN cross curves, 206–208
 - statical stability curves, 208–214
- Curve of permissible lengths, 294
- 'Cyclone alley', 461–462

D

- Deadweight, 3
- Deadweight (Dwt) Scale, 433–435
- Density
 - effect of change on draft and trim, 429–432
 - effect on displacement for constant draft, 10–13
- Density change, effect of with displacement as constant on box-shaped vessels, 4–6

- Density change, effect of (*Continued*)
 on ship-shaped vessels, 6–10
 on displacement when draft is constant, 10–13
- Department for Transport (DfT), 21–22, 309
 ‘standard ship’, 297
- Displacement, 3
- Displacement curves, 30–35
- Dock Water Allowance, 8–10
- Domains of ships, 397–398
- Draft, 229, 230, 231, 231f, *see also*
 True mean draft correction
 change due to change of trim,
 173–174
 effect of density change,
 429–432
 effect of hog and sag, 333–335
 formulae, 489–490
 increase due to list in box-shaped
 vessels, 241–246
 increase due to list in vessels
 having a rise of floor,
 244–246
 loading to requirement, 193–195
 maintaining, 191–192
- Draft amidships
 effect of hog and sag, 333–335
- Draft surveys, 467–472
- Drafts and trim considerations,
 496–497
- Drydocking process, 355–366
 formulae, 494
- Dynamical stability, 219–220
 Moseley’s formula for,
 219–220
 and statical stability curves,
 219–226
- E**
- Effect of free surface, formulae,
 494
- Effective length, 315
- ‘Effects’, 342
- Equilibrium, 17–19
 correcting, 19
 neutral, 19, 19f
 stable, 16f, 17–18
 unstable, 18, 18f
- Even keel, 236t, 239t, 240t
- Examination questions, 509–517
- Examination tips, 523–524
- F**
- Factor of subdivision, 294
- Final KG, 117–119
- Fineness of displacement, block
 coefficient of, 38–39
- Five/Eight Rule, 56, 60–61
- Floating Liquefied Natural Gas
 (FLNG) Project in NW
 Australia, 460–463
- Floodable length, 293
- Floodable length (FL) curve, 293
- Form coefficients formulae, 489
- Free surface effect (FSE), 251–262
 formulae, 494
 on stability, 23–28
- Freeboard, effects of increase on
 stability, 216–217
- Freeboard marks, 299–312, 310f
 formulae, 494
- Freeboard value corrections,
 303–309
 bow height correction, 304–305
 C_b correction, 304
 depth correction, 303–304
 sheer correction, 307–308
 strength correction, 308–309
 superstructure correction,
 305–307
- Freeboards of oil tankers/general
 cargo ships, 300
- Fresh Water Allowance (FWA), 6
- Fully loaded drafts, 41, 41t
- G**
- GM (initial transverse metacentric
 height)
 from inclining experiment,
 337–344
 negative, 20–21
 value, 21–22, 22t
 virtual loss of, after taking the
 blocks overall, 363–364
 working values, 21–22
- Grain heeling arm, 320f
- Grain Rules, 319–330
- Grounding, 151–153, 367–369,
 398–402
- formulae, 494
- Group weights, 3–4
- GZ (righting lever), 15, 17–18
 Stability Cross Curves, 203
- GZ cross curves, 203–206
- H**
- Half-ordinate, 56
- Heaving motions, 420–423
- Heel, 15
 angle of, 131–138
 due to turning, 145–148
 formulae, 495
- Herald of Free Enterprise*, capsize
 of, 541–546
 changes in ship construction and
 operation after, 544–545
 reasons for, 542–544
- Hog, effect on draft amidships,
 333–335
- Hull form, 289
- Hydrostatic curves, 229–233
 and values for vessels initially
 having trim by the bow or by
 the stern, 235–240
- I**
- Icing allowances, 285–288
- IMO Grain Code, 319–330
- Inclining experiment, 337–344
- Initial metacenter, 158–159
- Initial metacentric height,
 158–159, 210
- Interaction, 397–404
- Interaction effects, 382, 397–398
 reducing, 403–404
 ship-to-ground, 398–402
 ship-to-ship, 402–404
 ship-to-shore, 404
 squat, 398–402
- Intermediate ordinates, 65–66
- International Maritime Organiza-
 tion (IMO), 474
- K**
- KB
 for box-shapes, 101–104
 line or loci, 112
 determination by Morrish’s
 formula, 101–102, 104

- determination by Simpson's Rules, 75–78
 formulae, 491
 for triangular prisms, 101–104
- KG**, 117–119
 determination for light condition, 337, 339–340
 final determination, 109–110
 MOANA's displacement and, 235
- KM curve** (locus of metacenters), 113
- KN cross curves of stability**, 206–208
- L**
- LBP**, 289
- LCB position relative to amidships**, 45–50
- Lightweight**, 3
 fluctuations in, over a period of time, 341–343
 inclining experiment and fluctuations in, 337–344
- List**, 15
 definition, 15
 determination, 120–122
 due to bilging side compartments, 139–144
 formulae, 493
- List and trim, combined**, 247–250
- Lloyds' Strength Regulations**, 287
- Lloyds' surveyors**, 473
- Load lines**, 299–312
- Locus of metacenters (KM curve)**, 113
- Loll, angle of**, 20–21
- Longitudinal center of buoyancy (LCB)**, 292
- Longitudinal center of flotation**, 229f, 230
- Longitudinal metacenter**, 169, 171–173
- Longitudinal metacentric height**, 169
 determination using change of trim, 184–187
- Longitudinal stability formulae**, 492
- Longitudinal stability** *see* Trim
- Loss of statical stability**, 287f
- Lumber marks**, 313–314
- M**
- Margin line**, 293
- Maximum GZ**, 209
- Maximum Permissible Deadweight Moment diagram**, 442–446
- Maximum squat, calculation of**, 384–386
- Mean sheer**, 307–308
- Merchant ships, general particulars of**, 557–558
- Metacenter**, 15–16
- Metacentric diagrams**, 109–116
- Metacentric height**, 16
 longitudinal, 160, 195–198
- Midships coefficient**, 39
- MOANA, hydrostatics for**, 235, 236f
 KMT values for, 239t, 240t
- 'Moment of inertia about the centerline'**, 84–86
- Moment of statical stability**, 17, 23–24, 157
 at large angle of heel, 159–166
 at small angle of heel, 158–159
- Moment to change trim 1 cm (MCT 1 cm or MCTC)**, 170–173
- Moments about the centerline**, 160–161
- Moments about the keel**, 124
- Moments of inertia**
 Simpson's Rules for, 81–90
- Morrish's formula**, 101–102, 104
- Moseley's formula**, 219–220
- M.S. (Load Lines) Rules 1998**, extracts, 477–482
- MV Derbyshire**, 228
- M.V. 'Tanker'**, 203, 204t, 206t
- N**
- Negative GM and angle of loll**, 20–21
- Neutral equilibrium**, 19, 19f, 154
 correcting, 19
- Normand's formula**, *see* Morrish's formula
- O**
- One-liner questions**, 519–521
- P**
- Pacific Glory Case Study**, 405–411
- Parallel axes theorem**, 82–88, 93t, 496
- Parametric rolling**, 426–427
- Passenger–Cargo vessels**, 294
- Permeability**, 293
 compartment, 266–267
 formulae, 494
- Permeability effects**, 263–280
- Permeability factors (PF)**, 297
- Permissible length (PL) curve**, 294
- Pitching motions**, 419–420
- Plimsoll, Samuel**, 299
- Plimsoll line**, 299
- Point of suspension**, 132
- Pressure bulbs**, 397–398
- Prismatic coefficient**, 40–43, 289
- Pro-forma sheet**, 449f, 450f
- Q**
- Qflex LNG vessels**, 457–459
- Qmax LNG vessels**, 457–459
- Quality control and work of ship surveyors**, 473–475
- Quasi-steady loss**, 228
- R**
- Radius of roll**, 16f
- Range of stability**, 209, 215
- Relative density**, *see specific gravity*
- Revision questions**, 509–517
- Righting couple**, 15
- Righting lever**, 18, 283, *see also* GZ (righting lever)
 GZ cross curves, 203
 KN cross curves, 206
- Righting moment**, 281, 283f
- Rise in center of gravity**, 120–122
- Rolling, in still water**, 413
- Rolling period, formulae**, 416
- Royston Grange Case Study**, 407–411

- S**
- Saab radar gage, 349
- Safety of Life at Sea organization (SOLAS), 299
- Sag, effect on draft amidships, 333–335
- Seasonal allowances, 311
- Second moment of area, 81–83
- Sectional area (SA) curve, 289–292
- Shallow water indications, 367–368
- Shear forces, in ships, 438
- Sheer ratio, 296–297
- Shift of the center of gravity, 132
- Ship squat
 definition, 367–368
 formulae, 367, 370–372, 494–496
 governing factors, 369–375
 interaction, 382
 for supertanker, 376–377
 with a vessel in a trench, 378–382
 in wide and narrow rivers, 382–388
- Ship stability data sheets, 525–539
 cargo capacities, 526
 general particulars, 525
 grain heeling moments, 532
 hydrostatic particulars, 527–529
 plan showing cargo spaces, storerooms, and tanks, 526
 tabulated KN values, 530
 tank capacities, 527
- Ship surgery, 342
- Ship surveyors, 473
- Ships
 construction rules, 478–479
 stability rules, 479–481
 shape volumes, 62–63
- Ship-to-ground interaction, 398–402
- Ship-to-ship interaction, 402–404
- Ship-to-shore interaction, 404
- Side winds, effects of, 281–284
- Silt saucer, 410f
- Simple harmonic motion, 413
- Simplified stability information (Merchant Shipping Notice 1122), 441–446
- Simpson's Multipliers, 57–58
- Simpson's Rules
 for determining centers of pressure, 91–100
 using horizontal ordinates, 91–94
 using vertical ordinates, 94–97
- First, 51–53, 56–58, 487–491
 for moments of inertia, 81–90
- Second, 53–54, 59–60, 487–491
- Third, 54–56, 60–61, 487–491
 use of radian intervals, 221–222
- Slack tanks, 251–262
- Sounding, 345–350
- Sounding pad, 349
- Sounding pipe, 345
- Sounding tube, 347f
- Specimen exam questions, 509–517
- Squat, *see* Ship squat
- Stability
 effect of bilging, 276–277
 effect of increasing beam, 215–218
 effect of increasing freeboard, 216–217
 formulae summary, 491–493
- Stability Cross Curves
 GZ set, 203
 KN set, 206
- Stable equilibrium, 16f, 17–18, 154
- Standard camber, 302
- Static trim, 375–377
- Statical stability
 relating to wave profiles, 227–228
- Statical stability curves, 208–214
 and dynamical stability, 219–226
- Stiff (ship condition), 20
- Stowage factor, 319
- Subdivided common intervals, 65–69
- Subdivision beam, 294
- Subdivision draft, 294
- Subdivision length, 294
- Subdivision load line, 294
- Sub-zero temperatures, 285, 287
- Suspended weight, center of gravity of, 131–132
- Syllabuses, for Masters and Mates, 501–507
- Synchronous rolling, 425
- T**
- Tabular freeboard, 313–318
- Tabulated freeboard values, 300–303
- Tank soundings, effect of trim, 490
- Tender (ship condition), 20
- Theorem of parallel axes, 82–88
- Thrust, 91
- Tien Chee Case Study, 407
- Timber ship freeboard marks, 313–318
- Time period, 20
- 'Tipping center', 168–169, *see also* Center of flotation
- TPC curves, 29–30
- Transverse squat, 401f, 403
- Transverse stability formulae, 491
- Transverse statical stability, 15–22
 equilibrium, 17–19
 neutral equilibrium, 19, 19f
 stable equilibrium, 16f, 17–18
 unstable equilibrium, 18, 18f
 formulae, 492–493
 GM value, 21–22, 22f
 metacenter, 15–16
 negative GM and angle of loll, 20–21
 stiff (ship condition), 20
 tender (ship condition), 20
 unstable and neutral equilibrium, correcting, 19
- Trench, fitting, 378–382
- Triangular-shaped prism
 BM calculation, 107–108, 170
 KB calculation, 107–108
- Trim, 167
 change of, 198–199
 effect of density change, 429–432

- effect on tank soundings, effect of trim, 490
- effects of loading/discharging/moving weights, 179–187
- effects of shifting weights, 174–178
- formulae, 490
- icing allowances plus effects on, 285–288
- use of change to find longitudinal metacentric height, 195–198
- use to determine centre of flotation, 187–190
- Trim and list, combined, 247–250
- Trim and Stability book, 437–439
- Trimming by the bow, 236–237
- Trimming by the stern, 235
- Trimming moment, 271
- Triple 'E' container ships, 459–460, 459f
- True mean draft, 331–336
- True mean draft correction, 331–335
- Turning, effect on heel, 145–148
- Turning circle diameter (TCD) values, 389–396
- calculations, 392–394
- observations, 392
- updates of 1987 and 2002, 389–390
- Two-compartment flooding, 296
- Type A vessel, 299
- Type B vessels, 300
- Type B-60 vessels, 300
- Type B-100 vessels, 300
- U**
- Ullage, 345–350
- Ultra Large Crude Carriers, 459
- Underkeel clearance, 244t
- Unstable equilibrium, 18, 18f
- correcting, 19
- V**
- Venturi effect, 376
- Volume calculations, 69–70
- Volumes of irregular figures, 51–56
- Volumes of ship shapes, using Simpson's Rules, 62–63
- W**
- Wall-sided formula, 159–166
- Water draft, 3
- Waterplane area, 56–61
- using extension of Simpson's Second Rule, 59–60
- using Five/Eight Rule (Simpson's Third Rule), 60–61
- using Simpson's First Rule, 56–58
- Waterplane area, coefficient of fineness of, 37–38
- Wave profiles, 227–228
- Wedge of buoyancy, 15–16
- Weights
- effect on trim of loading/discharging/moving, 179–187
- effect on trim of shifting on board, 174–178
- loading to keep after draft constant, 191–192
- loading to produce required draft, 193–195
- Whessoe gauge, 348f, 349
- Wind forces, 281
- Wind heeling arm, 281
- Wind heeling moment, 282f
- Wind moments, 283f
- Z**
- Zero speed, 236t, 237t, 238t